

TubeLiner-TPAEvolution

TUBE HOT STAMPING MACHINE WITH BEST COST – PERFORMANCE RATIO




Application possibilities

- Precise hot stamping of cylindrical plastic and laminate tubes with or without caps as well as heat transfer applications with foils.

Main features

- Quick change-over from one product to another
- High hot stamping accuracy
- High availability and reliability
- Simple operation
- In- and offline operation mode possible
- Compact design

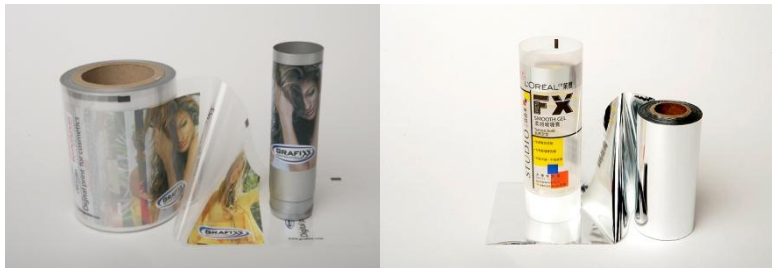

Technical data

- Output up to 50 tubes / minute
- Tube diameter 13.5 – 50 mm
- Tube length 50 – 250 mm
- Stamping range width up to 200 mm at 360
- Foil diameter \varnothing 25.4 mm / \varnothing 150 mm